

15L STANDARD SKIMMER WITH SQUARE COVER MANUAL INSTALLATION




MODELS:

EMO130-SC

EMO130-SV

EMO140-SC

EMO140-SV

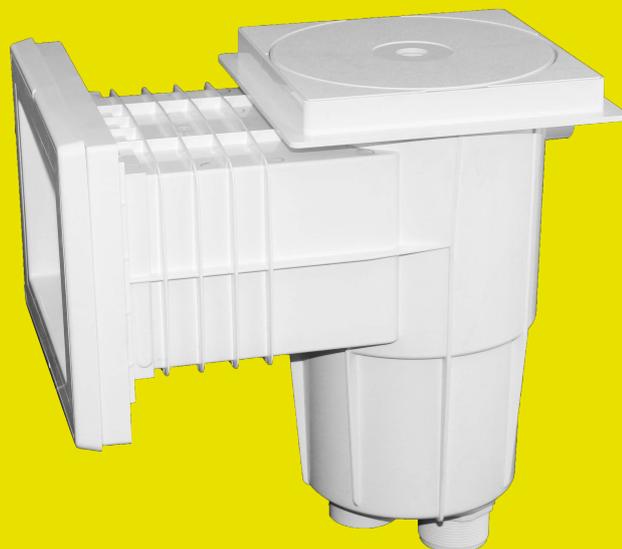

1. 15L STANDARD SKIMMER

Skimmers are used to eliminate the dirtiness suspended on the surface of the pool. For this reason, when building the pool, it is recommended to install the skimmers so that their mouths facing the prevailing winds.

MODELS AVAILABLE

MODELS: EM0130 SC EM0130 SV EM0140 SC EM0140 SV
CODES: 88152412 88152512 88152612 88152712

	CONCRETE POOL	VINYL/LINER POOL
STANDARD SKIMMER	EM0130-SC	EM0130-SV
WIDE MOUTH SKIMMER	EM0140-SC	EM0140-SV

IMPORTANT


This instruction manual includes essential information on the safety measures to be implemented for installation and start-up. Therefore, the installer as well as the user must read the instructions before starting installation and start-up. Keep this manual for future

2. INSTALLATION


Peraqua recommends to install 1 skimmer per 25 m² of pool water surface, knowing that the skimmer maximum flow rate should not exceed 5 m³/h. Normally, in residential pools, the skimmers are installed along the width of the pool, and in the deepest side. For pools when more than 3 skimmers are required, they can be installed along the length of the pool. However, in both cases, skimmer must always be positioned on the opposite side of the wall inlet nozzle.

The installation, depending on the chosen type of skimmer, must proceed as followed in Fig.1 and Fig.2:

INSTALLATION IN A TILED POOL

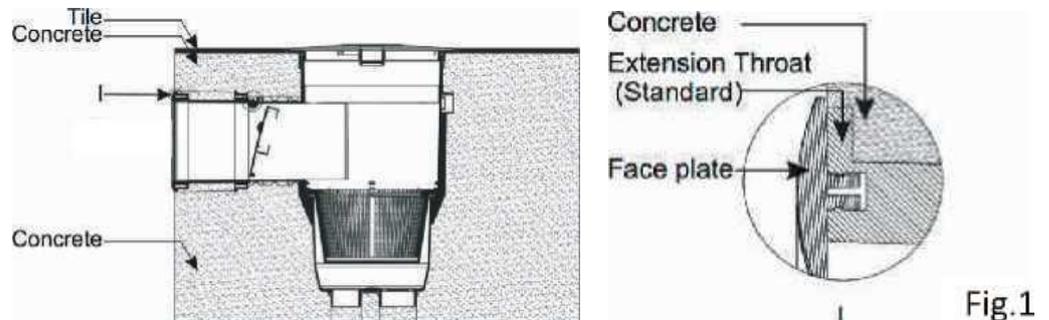

INSTALLATION IN A VINYL POOL

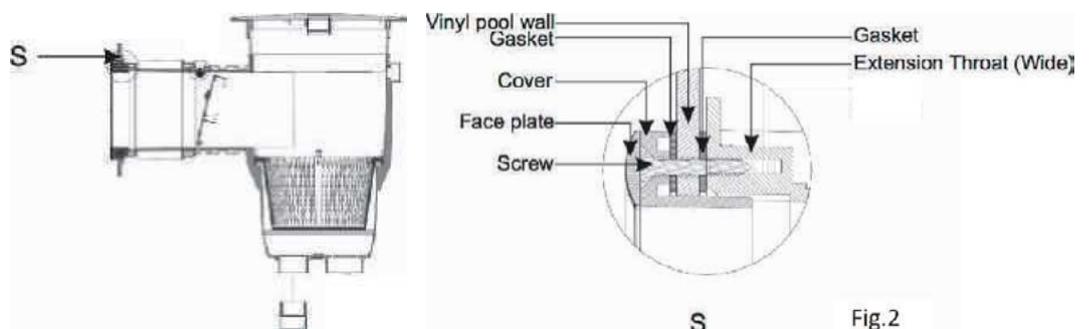

For Concrete, Vinyl or Liner pools ensure that the pool water level is constant and ¾ parts of the skimmer is submerged in the water. This avoids air suction into the circuit that can damage the filtration pump.

The cover and the basket from the skimmer are assembled with a BayonetSystem, so do not pull brusquely upwards, but first turn until the two sides of the cover or basket match with the body, and then pull upwards.

3. VACUUM SUCTION CONNECTION

Thanks to the provided vacuum plate skimmers can also be used for vacuum cleaning equipment. The vacuum plate is placed on the basket of the skimmer, and connects the vacuum hose of the pool cleaner and the hole of the vacuum plate (Fig. 3)

In order to obtain the maximum vacuum efficiency when using the pool cleaner connected to the skimmer, ensure that the main drain valve is close. If more skimmers are installed in the pool, they should be closed off using the flow plug provided.



Fig. 3


4. SAFETY WARNINGS

The skimmer should be installed by a specialist technician.
Do not place chlorine or bromide tablets in the skimmer basket.
It is recommended to use products specifically designed to work with ABS.

5. SPARE PART LIST


EM0130-SC

POS.	PRODUCT DESCRIPTION
1	Skimmer Lid
2	Square Rim
3	Vacuum plate with Plug
4	Skimmer basket
5	Regulating plug
6	Skimmer body
7	Skimmer flap
8	Hinge flap
9	1.5" conversion Connector

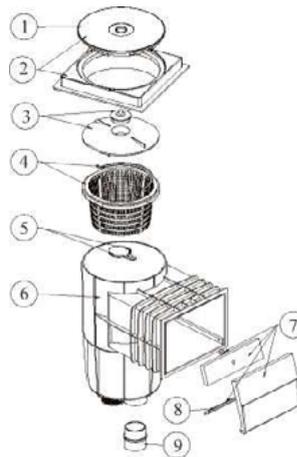


EM0130-SV

POS.	PRODUCT DESCRIPTION
1	Skimmer Lid
2	Square Rim
3	Vacuum plate with Plug
4	Skimmer basket
5	Regulating plug
6	Skimmer body
7	Skimmer flap
8	Hinge flap
9	Adaptor frame
10	Screws
11	Skimmer gaskets for Liner.
12	Skimmer frame
13	1.5" conversion Connector

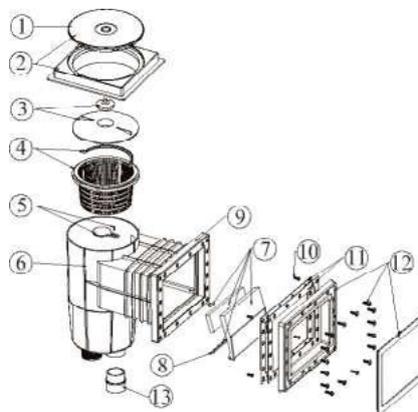


EM0140-SC

POS.	PRODUCT DESCRIPTION
1	Skimmer Lid
2	Square Rim
3	Vacuum plate with Plug
4	Skimmer basket
5	Regulating plug
6	skimmer booy
7	Skimmer flap
8	Hinge flap
9	Extension throat
10	Skimmer frame for liner
11	1.5" conversion Connector

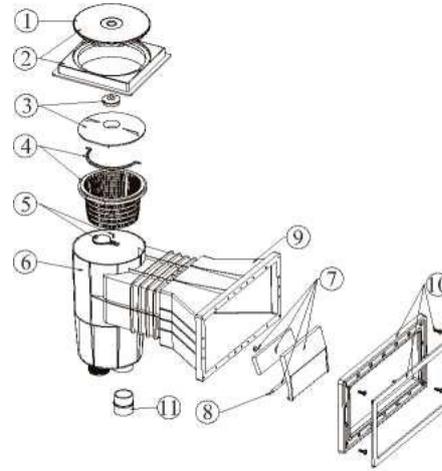

EM0140-SV

POS.	PRODUCT DESCRIPTION
1	Skimmer Lid
2	Square Rim
3	Vacuum plate with Plug
4	Skimmer basket
5	Regulating plug
6	Skimmer body
7	Skimmer flap
8	Hinge flap
9	Extension throat
10	Screws
11	Skimmer gaskets for Liner.
12	Skimmer frame
13	1.5" conversion Connector

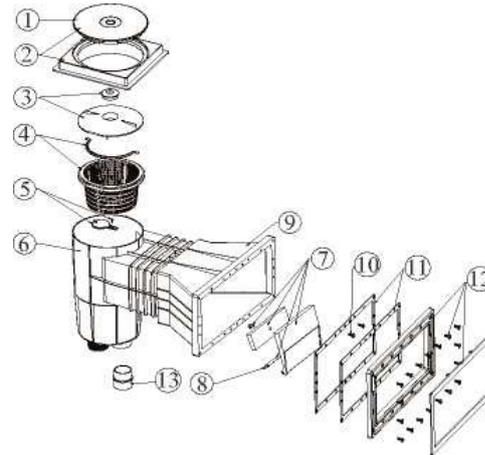

..... **HEADOFFICE/EXPORT AUSTRIA**



+43 7435 58488-0 info@peraqua.com

..... **SERVICE/LOGISTICS**



+49 91719677 1200 office.de@peraplas.com



+420 323 63 76-73 office.cz@peraplas.com